


C27.11



Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 5-28 mm
 Maximum safety load: 20 kN
 Jaws length: 120 mm
 Weight: 1,9 kg
 Dimensions: 320 x 180 mm


C30.11

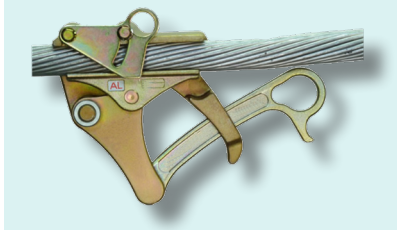

Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 18-35 mm
 Maximum safety load: 30 kN
 Jaws length: 120 mm
 Weight: 2,4 kg
 Dimensions: 320 x 180 mm


C32.10

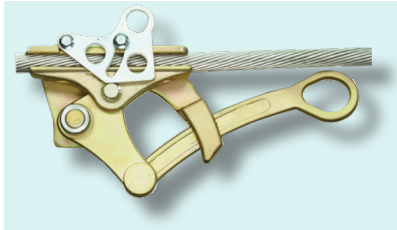

Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 18-36 mm
 Maximum safety load: 50 kN
 Jaws length: 180 mm
 Weight: 4,7 kg
 Dimensions: 380 x 200 mm

C33.10

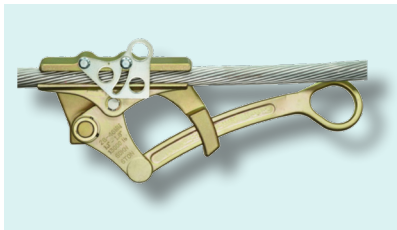

Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 28-46 mm
 Maximum safety load: 60 kN
 Jaws length: 220 mm
 Weight: 7,0 kg
 Dimensions: 420 x 220 mm

3105.1



Self-gripping clamps fit for:

- aluminium, ACSR and ACCC, copper conductor: 8-35,2 mm
- steel conductor and ground wire: 8-22 mm
- jaws length: 272 mm
- steel rope: 8-24 mm

Interchangeable liners (type G05.A) conductor diameter to be confirmed.

Maximum safety load: 75 kN
 Minimum breaking load: 225 kN
 Weight: 15 kg

3112.1



Self-gripping clamps fit for:

- Ground wires with optical fiber (OPGW) with external diameter 6-23 mm
- Interchangeable liners (type G12TA.1)

Maximum safety load: 49 kN
 Minimum breaking load: 180 kN
 Weight: 7 kg

G12TA.1 Interchangeable liners in adiprene and aluminium, on demand according to OPGW diameter