FRBU 9 Port Closure: FRBTB-BXBNC3X

B Length, Article number: 857-00635



Features

- Maximum 144 fibre splice capacity
- 8 round ports and 1 oval port
- Fibre storage basket for loop through applications (Hellapon Medium side hinged 3 tray version only)
- Accommodates Hellapon Medium side hinged trays
- Maximum 24 splices per tray (double stacked)
- Splitter accommodation • Cablelok compatible for all port sizes




Optional flash test valve and/or grounding feed-through



Base Data Colour Black (BK) FRBU 9 Port Base Content B-Length Cover (Dome) Quick Release Clamp Sealing 'O' Ring Fibre Storage Basket (3 tray version only) Tray Support Frame Anchor Fixing Kit (2) Tray Tool Transportation Tubing Hook and Loop Management Ties Cable Ties Isopropyl Alcohol Wipes Desiccant Installation Guide Marker Kit Red Marker 1 - 12 Green Marker 1 – 12 Cover Type В Method of Sealing Cablelok, Heatshrink Pack Cont. 1 Set Package Quantity per kit PART DESCRIPTION FRBTB-BXBNC3X L, B, R Port 1, 4, 4 Port count **Product Family** B Length Product Group FRBU 9 Port Closure **Qty Trays** 3 36 Splice Capacity The FRBU 9 Port B Length closure is supplied with a Polypropylene base. The base configuration of 8 round ports and 1 oval port **Technical Description** covers a cable diameter range of 1.7 – 20.0mm when using Cablelok mechanical seals and 6.0 – 24.0mm when using heatshrink. The mounting system is manufactured from Grade 304 stainless steel and can accommodate a maximum of 6 Hellapon Medium side hinged trays or 3 Hellapon Medium side hinged trays and basket giving a maximum of 144 fibre splices based on 24 fibres per tray. The fibre basket provides storage space for the storage of fibre loops within the closure. The tubed closure and the position of the mounting system allows for ease of access and traceability of the fibre on to the trays. The trays are white which makes it easy to see the colour of the fibre elements as they are routed through the fibre management system and on to the trays. Type of Tray Hellapon Medium Side Hinged Variant Outdoor Enclosure **Product Dimensions**

1 Todact Difficusions		
D1	130 mm	
D1	5.1 "	
D2	130 mm	
D2	5.1 "	
Length	505 mm	

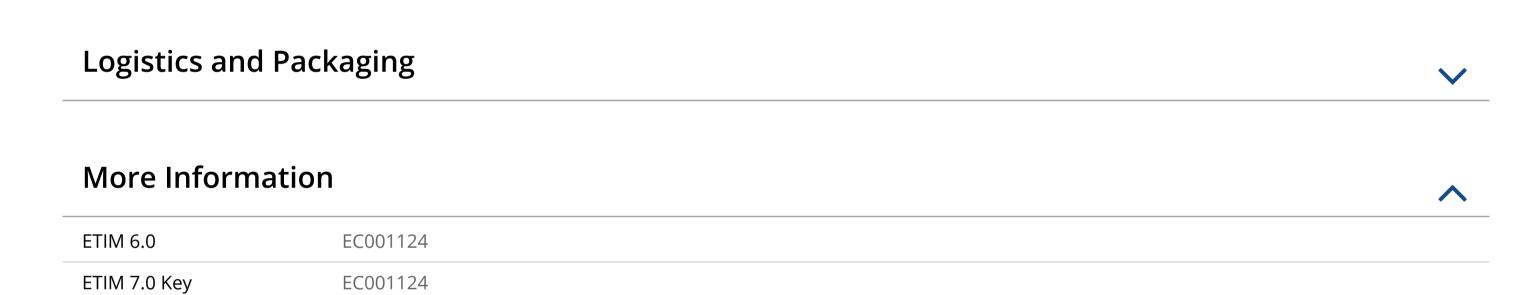



43223338

Material and Specifications



UNSPSC Key

Material






Polypropylene (PP)





FDNIR-BXXCWX 857-00500 FDN 59 Port Integrated **Routing Closure**



FDNTB-BXXAD41 857-01025 FDN 16 Port Tubed Closure



857-01026 FDN 16 Port Tubed Closure

FDNTB-BXXAH4X



857-01027 FDN 16 Port Tubed Closure